

Dynatec SERIES "P"

High Performance Metal-Seated Butterfly Valves

Wafer & Lug

Sizes 2" to 48" / DN 50 – DN 1200



Leading the Industry with Innovation by Design

High Performance Butterfly Valve

Features


- Double eccentric
- Non-rubbing
- Zero leakage (or under 3×10^{-7} atm.cc/sec)

Applications

- Energy Systems – Moisture & circulating at power plants, thermoelectric and hydroelectric power plants, pure water cooling water, acidic water, etc.
- Water Treatment Plants – Water supply, sewerage, purifiers, and other water treatment facilities, city water, well water, river water, waste water, etc
- DHC and Air Conditioning – Cold water, warm water and clear water of water supply & drain line in local air cooling & heating systems.
- Shipbuilding – Fuel oil and lubricating oil in an engine room of cargo line, and other general shipboard uses.
- Semiconductor Industry – Processing line of ultra pure water and ultra pure gas, semiconductor product line, LCD & PDP product line, and condenser lines.
- Others – Chemical industry, food industry, steel works, etc.



Dimensions

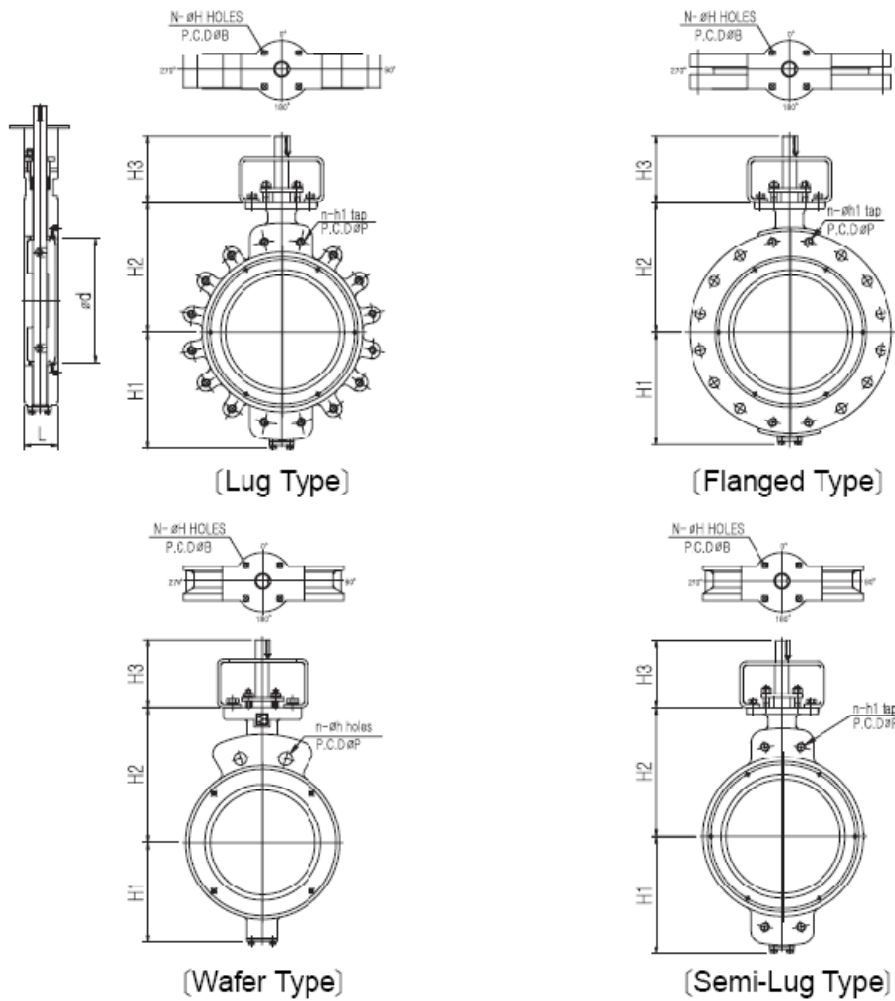


DIMENSIONS

(mm)

SIZE	L	Ød	ØD	H1	H2	H3	TOP FLANGE			ANSI 150LB		
							ISO 5211			n-øh	H1	ØP
							ØB	N-ØH	TYPE			
2"	43	45	95	68	124	108	70	4-10	F7	4-19	5/8"	120.6
2.5"	46	52.5	108	71.5	140	108	70	4-10	F7	4-19	5/8"	139.7
3"	48	66	121	79.5	158.5	108	70	4-10	F7	4-19	5/8"	152.4
4"	52	88	155	95	173	108	70	4-10	F7	8-19	5/8"	190.5
5"	56	114	180	110.5	190	108	70	4-10	F7	8-22	3/4"	215.9
6"	56	139	205	126	205	108	70	4-10	F7	8-22	3/4"	241.3
8"	60	193	256	155	243.5	130	102	4-12	F10	8-22	3/4"	298.4
10"	70	235	321	210	272	150	102	4-12	F10	12-25	7/8"	361.9
12"	78	287	367	250	301.5	150	102	4-12	F10	12-25	7/8"	431.8
14"	78	323	413	275	340	150	102	4-12	F10	12-28	1"	476.2
16"	102	364	470	309.5	362	195	140	4-18	F14	16-28	1"	539.7
18"	114	409.5	534	347.5	377.5	210	140	4-18	F14	16-32	1-1/8"	577.8
20"	127	458	584	375	405	180	165	4-22	F16	20-32	1-1/8"	635
22"	154	512	643	421	458	210	165	4-22	F16	20-35	1-1/4"	692.1
24"	154	560	692	432.5	462.5	210	165	4-22	F16	20-35	1-1/4"	749.5
26"	165	620	749	527	560.5	240	165	4-22	F16	24-35	1-1/4"	806.5
28"	165	673	796	583	618	240	254	8-18	F25	28-35	1-1/4"	863.5
30"	190	728	851	634	665	240	254	8-18	F25	28-35	1-1/4"	914.5
32"	190	779	902	687	720	270	254	8-18	F25	28-42	1-1/2"	978
34"	203	831	957	746	777	270	254	8-18	F25	32-42	1-1/2"	1029
36"	203	885	1019	803	835	270	254	8-18	F25	32-42	1-1/2"	1086
40"	216	941	1076	863	896	305	254	8-18	F25	36-42	1-1/2"	1200
44"	241	1001	1139	908	949	305	350	8-23	F30	40-42	1-1/2"	1314.5
48"	254	1057	1200	986	953	305	350	8-23	F30	44-42	1-1/2"	1422.4

Dimension table could be flexible for product improvement reasons.

Metal Seat Design

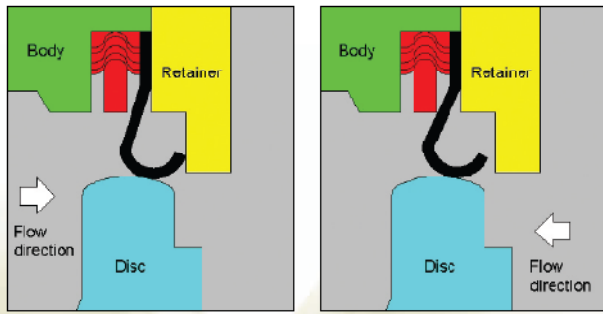

The Dynatec "P" Series seat design offers a very high sealing capability, with a very low leakage rate.

"P" Series Product Code

Item	Size	Type	Class	Operator	Body	Disc	Seat	Shaft		
1	2	2	3	4	4	5	6	7	8	9
P	0	2	W	1	5	L	G	C	F	B

Example: High Performance, 2" Wafer, 150 lb, Lever Operator, A216WCB Body, A351 CF8M Disc, 316SS Seat, A276 316 Shaft

1 - Item			6 - Body		
P - High Performance			A - B148 C954	D - A351 CF3M	G - A216 WCB
2 - Size			B - A351 CF8	E - B584 C336	H - A536 Gr65-45-12
15 - 1.5"	08 - 8"	22 - 22"	C - A351 CF8M	F - A126 CLB	X - Other
02 - 2"	10 - 10"	24 - 24"	7 - Disc		
25 - 2.5"	12 - 12"	26 - 26"	A - B148 C954		
03 - 3"	14 - 14"	28 - 28"	B - A351 CF8		
04 - 4"	16 - 16"	30 - 30"	C - A351 CF8M		
05 - 5"	18 - 18"	32 - 32"	D - A351 CF3M		
06 - 6"	20 - 20"	34 - 34"	X - Other		
3 - Type			8 - Seat		
W - Wafer			E - 304SS		
L - Lug			H - Stellite 6		
4 - Class			F - 316 SS		
15 - 150 lb			I - Inconel		
30 - 300 lb			9 - Shaft		
60 - 600 lb			A - A276 304		
5 - Operator			F - A564 630		
L - lever	S - single air actuating		B - A276 316		
G - gear	D - double air actuating		G - A276 410		
C - chain	E - electric actuating		C - Inconel 625		
B - bare	X - other		X - Other		
			D - Monel K500		
			E - A276 316L		

All statements, technical information and recommendations in the bulletin are for general use only. Dynatec is not responsible for suitability or compatibility of these products in relation to system requirements. Consult Dynatec distributors or factory for the specific requirements and material selection for your intended application. Dynatec reserves the right to change or modify product design or product without prior notice.

Distributor

Dynatec

155 Commerce Blvd.
 Loveland, OH 45140
 Phone 513-583-4800
 FAX 513-583-4815